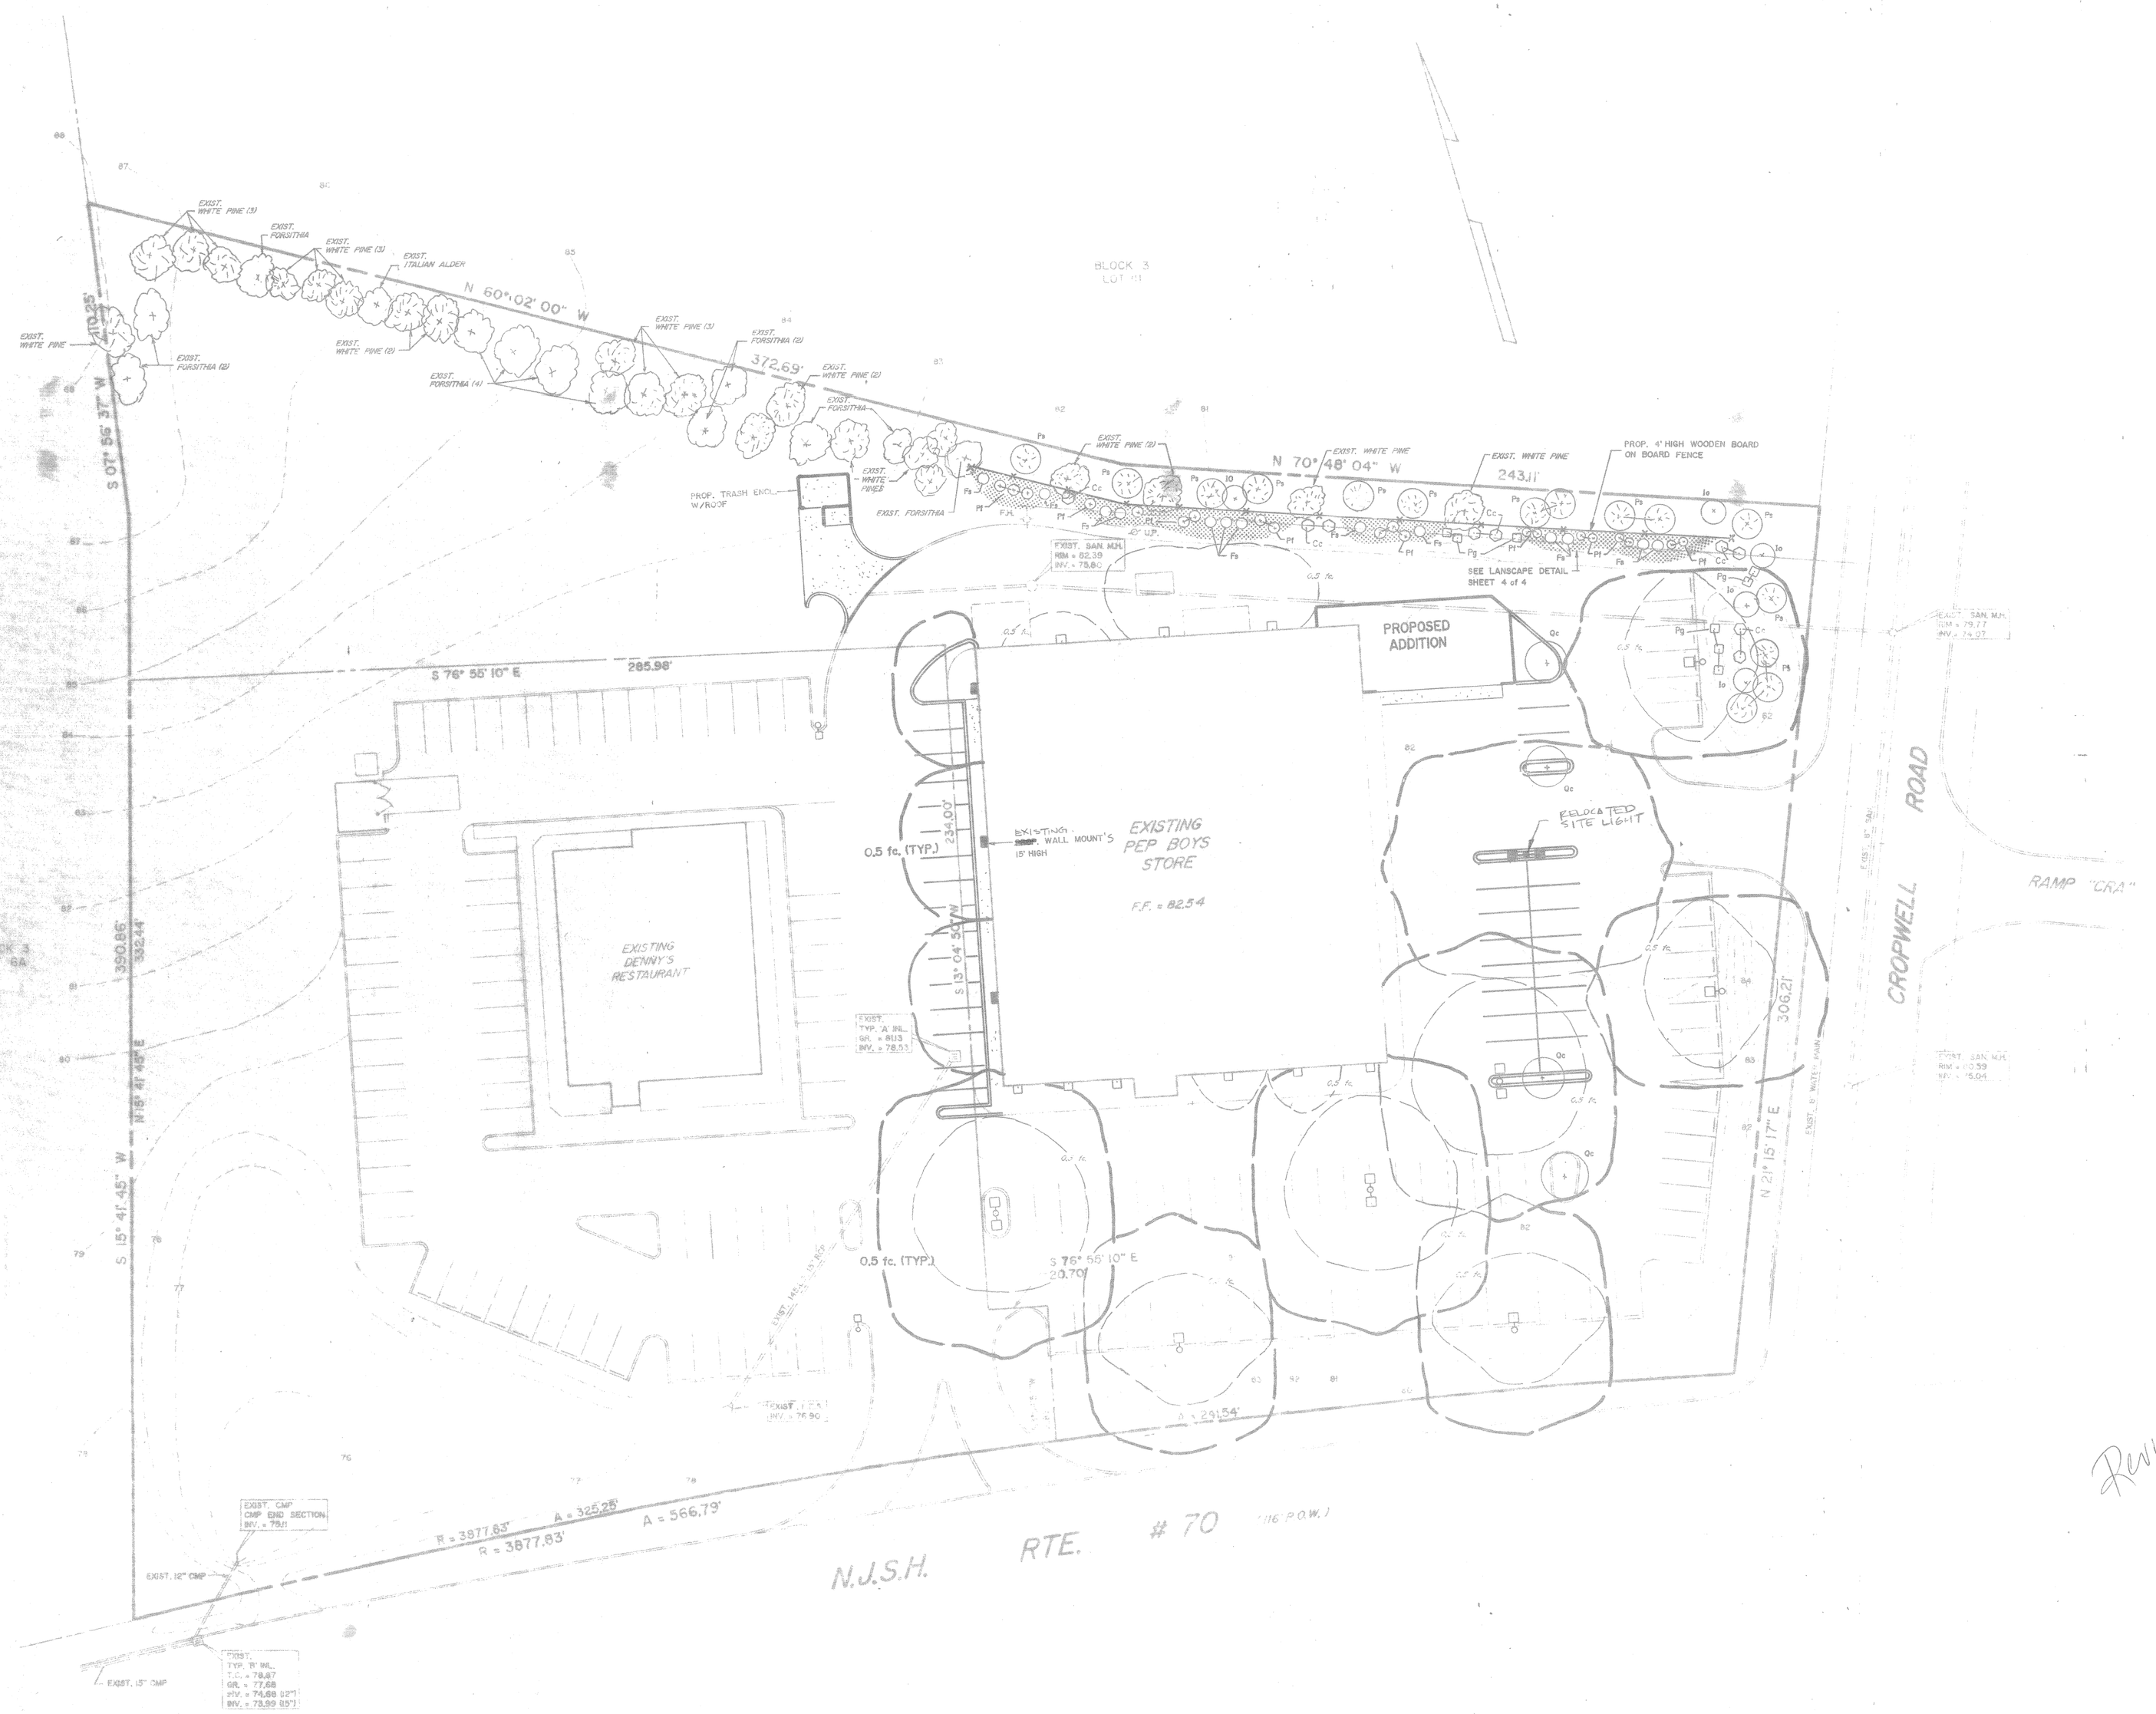

PROPOSED PLANTING SCHEDULE					
QTY.	KEY	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS
13	Fs	FORSYTHIA	FORSYTHIA INTERMEDIA	3'-4'	—
5	Io	AMERICAN HOLLY	ILEX OPACA	6'-7'	B & B
20	Pf	GRABEBI FIRE THORN	PYRACANTHA FORTUNEANA	3'-4'	—
15	Ps	PINUS STROBUS	WHITE PINE	6'-7'	B & B
4	Qc	QUERCUS COCCINEA	SCARLET OAK	9'-11'	B & B
8	Cc	CERCIS CHINENSIS	CHINESE REDBUD	12'-15'	#1 CAN
9	Pg	PRUNUS GLANDULOSA	DWARK FLOWERING ALMOND	18'-24'	B.R.

REFER TO E-1 FOR EXACT SITE LIGHTING WORK & CIRCUITING - THIS DRAWING FOR LANDSCAPE SCOPE ONLY

NOTES :

1) EXISTING LIGHT FIXTURES SHALL BE REPLACED WITH THE QL SERIES LAMP AND FIXTURE AS NOTED ON THE DETAIL SHEET 4 of 4.

2) PROPOSED LIGHT FIXTURES THAT ARE LOCATED ALONG CROPWELL ROAD SHALL HAVE LIGHT SHIELDS AFFIXED.

LEGEND :

- DENOTES EXISTING LIGHT FIXTURE
- DENOTES PROPOSED LIGHT FIXTURE
- DENOTES EXISTING ISOLUX LIGHTING PATTERN
- DENOTES PROPOSED ISOLUX LIGHTING PATTERN
- DENOTES 2' HIGH EARTH BERM W/WOOD MULCH COVERING

Revised addendum #1 4/28/94

RECEIVED MAY 3 1994

RECEIVED MAY - 2 1994

CONTRACTORS, INC.

REV.	DATE	DWN. BY	CHK'D BY	DESCRIPTION
4	4-28-94	R.A.H.	D.T.D.	ELIMINATED 2 FC LIGHTING - ISSUED FOR ADDEND#4
3	11-10-94	R.A.H.	D.T.D.	REVISE PER TOWNSHIP ENGINEERS REVIEW LETTER DATED 10-20-93
2	10-15-93	R.A.H.	D.T.D.	REVISE PER TOWNSHIP ENGINEERS REVIEW LETTER DATED 10-15-93
1	9-29-93	R.A.H.	D.T.D.	REVISE PER TOWNSHIP ENGINEERS REVIEW LETTER DATED 9-16-93

THE KRYDON GROUP
ENGINEERS, SURVEYORS & PLANNERS
CIVIL / TRAFFIC / REAL ESTATE
1 CHURCH STREET, P.O. BOX 1, BURLINGTON, N.J. 08016
(609) 386-3100

LANDSCAPE & LIGHTING PLAN "PEP BOYS"

PLATE 1, BLOCK 3, LOT 11A

EVESHAM TOWNSHIP, BURLINGTON COUNTY, NEW JERSEY

DANIEL T. DRISCOLL
N.J. PROFESSIONAL ENGINEER LIC. #27193
P.A. PROFESSIONAL ENGINEER LIC. #03401

DATE: 7-6-93
DRAWN BY: R.A.H.
CHK'D BY: D.T.D.
SCALE: 1" = 30'
Comm. No. 92046.01
Sheet L1 of 1